




IMPORTANT NOTICE - READ CAREFULLY Natural Gas Inline Bypass Ball Vaves

NOTE: These valves are designed for use with natural, manufactured or LP gas only.

- Read instructions before valve installation or maintenance.
- Inspect valves for foreign material. Remove any foreign material, being careful not to damage the ball surface or the port seals.
- Valve should always be left in either the fully open or fully closed position.
- Always apply a quality grade pipe thread sealant to the pipe before installation - **DO NOT USE PTFE(TEFLON™) TAPE.** Excess pipe sealant contacting the ball surface may cause the valve to leak.
- Always use wrenching flats nearest to connection point. Never insert a tool into the ball area of the valve to thread it onto the pipe. Incorrect or over-tightening of the valve on installation can cause valve failure.
- Installation torques should be reduced when using pipe heavier than schedule 40.
- Follow all applicable codes and procedures.
- Shutoff plug should operate smoothly, **STOP OPENING IMMEDIATELY WHEN RESISTANCE IS FELT.**

*Recommended procedure upon installation to ensure bypass shutoff plug is fully engaged.

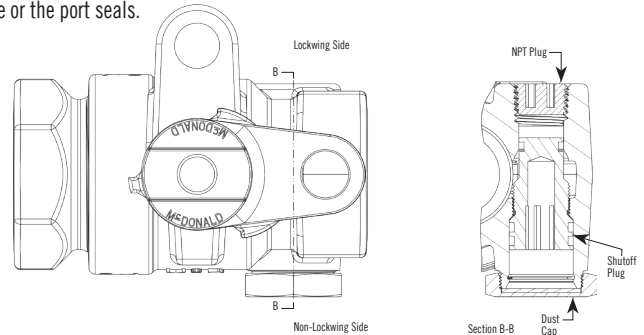

STEP 1

Remove the dust cap on the non-lockwing side of the inlet inline bypass ball valve.

STEP 2

Ensure the shutoff plug on non-lockwing side of inlet inline bypass ball valve is threaded in all the way. If the shutoff plug is not threaded all the way in, do so before proceeding.




IMPORTANT NOTICE - READ CAREFULLY Natural Gas Inline Bypass Ball Vaves

NOTE: These valves are designed for use with natural, manufactured or LP gas only.

- Read instructions before valve installation or maintenance.
- Inspect valves for foreign material. Remove any foreign material, being careful not to damage the ball surface or the port seals.
- Valve should always be left in either the fully open or fully closed position.
- Always apply a quality grade pipe thread sealant to the pipe before installation - **DO NOT USE PTFE(TEFLON™) TAPE.** Excess pipe sealant contacting the ball surface may cause the valve to leak.
- Always use wrenching flats nearest to connection point. Never insert a tool into the ball area of the valve to thread it onto the pipe. Incorrect or over-tightening of the valve on installation can cause valve failure.
- Installation torques should be reduced when using pipe heavier than schedule 40.
- Follow all applicable codes and procedures.
- Shutoff plug should operate smoothly, **STOP OPENING IMMEDIATELY WHEN RESISTANCE IS FELT.**

*Recommended procedure upon installation to ensure bypass shutoff plug is fully engaged.

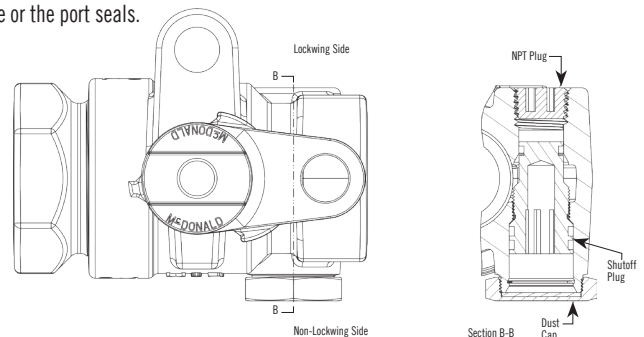

STEP 1

Remove the dust cap on the non-lockwing side of the inlet inline bypass ball valve.

STEP 2

Ensure the shutoff plug on non-lockwing side of inlet inline bypass ball valve is threaded in all the way. If the shutoff plug is not threaded all the way in, do so before proceeding.



IMPORTANT NOTICE - READ CAREFULLY

Natural Gas Inline Bypass Ball Vaves

NOTE: These valves are designed for use with natural, manufactured or LP gas only.

A.Y. McDonald's O-ring design insulated end assures positive sealing and long lasting service.

The **insulated end** is properly assembled to the valve by tightening the union nut hand tight plus 1/4 to 1/2 turns.

CAUTION - Excessive tightening could cause leakage.

The **non-insulating end** piece is properly assembled to the valve by tightening the union nut hand tight plus 1/4 to 1/2 turns.

If the O-ring is removed from the end piece, it can easily be replaced as follows:

1) Lay O-ring in groove - don't force it in with your fingers.

CAUTION - O-ring and groove must be free of foreign material. A coat of petroleum jelly should be applied to the O-ring after assembly.

2) Hand tighten the union nut onto the valve to uniformly press the O-ring into the groove.

3) This uniform pressure of the meeting of the valve and end piece will properly seat the O-ring.

CAUTION

Soaps, solvents or fluids containing Glycol that are used for testing or cleaning the valve are **NOT** to have any contact with ball.

Never try to disassemble an A.Y. McDonald valve. If the valve is damaged or otherwise not functional, immediately remove the valve and replace it with a new one.



WARNING: It is unlawful in **CALIFORNIA & VERMONT** (effective 1/1/2010); **MARYLAND** (effective 1/1/2012); **LOUISIANA** (effective 1/1/2013) and the **UNITED STATES OF AMERICA** (effective 1/4/2014) to use any product in the installation or repair of any public water system or any plumbing in a facility or system that provides water for human consumption if the wetted surface area of the product has a weighted average lead content greater than 0.25%. This prohibition does not extend to service saddles used in California, Louisiana or under USA Public Law 111-380.



IMPORTANT NOTICE - READ CAREFULLY

Natural Gas Inline Bypass Ball Vaves

NOTE: These valves are designed for use with natural, manufactured or LP gas only.

A.Y. McDonald's O-ring design insulated end assures positive sealing and long lasting service.

The **insulated end** is properly assembled to the valve by tightening the union nut hand tight plus 1/4 to 1/2 turns.

CAUTION - Excessive tightening could cause leakage.

The **non-insulating end** piece is properly assembled to the valve by tightening the union nut hand tight plus 1/4 to 1/2 turns.

If the O-ring is removed from the end piece, it can easily be replaced as follows:

1) Lay O-ring in groove - don't force it in with your fingers.

CAUTION - O-ring and groove must be free of foreign material. A coat of petroleum jelly should be applied to the O-ring after assembly.

2) Hand tighten the union nut onto the valve to uniformly press the O-ring into the groove.

3) This uniform pressure of the meeting of the valve and end piece will properly seat the O-ring.

CAUTION

Soaps, solvents or fluids containing Glycol that are used for testing or cleaning the valve are **NOT** to have any contact with ball.

Never try to disassemble an A.Y. McDonald valve. If the valve is damaged or otherwise not functional, immediately remove the valve and replace it with a new one.



WARNING: It is unlawful in **CALIFORNIA & VERMONT** (effective 1/1/2010); **MARYLAND** (effective 1/1/2012); **LOUISIANA** (effective 1/1/2013) and the **UNITED STATES OF AMERICA** (effective 1/4/2014) to use any product in the installation or repair of any public water system or any plumbing in a facility or system that provides water for human consumption if the wetted surface area of the product has a weighted average lead content greater than 0.25%. This prohibition does not extend to service saddles used in California, Louisiana or under USA Public Law 111-380.